



Reservoir Simulation Interface Configuration Guide

GOCAD Suite 2.5

GOCAD Suite



Copyright © 1998-2007, Paradigm Geotechnology B.V. All Rights Reserved.

The information in this document is subject to change without notice and should not be construed as a commitment by Paradigm Geotechnology B.V. or any of its affiliates (collectively, "Paradigm"). Paradigm assumes no responsibility for any errors that may appear in this document.

The Copyright Act of the United States, Title 17 of the United States Code, Section 501 prohibits the reproduction or transmission of Paradigm's copyrighted material in any form or by any means, electronic or mechanical, including photocopying and recording, or by any information storage and retrieval system without permission in writing from Paradigm. Violators of this statute will be subject to civil and possible criminal liability. The infringing activity will be enjoined and the infringing articles will be impounded. Violators will be personally liable for Paradigm's actual damages and any additional profits of the infringer, or statutory damages in the amount of up to \$150,000 per infringement. Paradigm will also seek all costs and attorney fees. In addition, any person who infringes this copyright willfully and for the purpose of commercial advantage or private financial gain, or by the reproduction or distribution of one or more copies of a copyrighted work with a total retail value of over \$1,000 shall be punished under the criminal laws of the United States of America, including fines and possible imprisonment.

The following are trademarks or registered trademarks of Paradigm Geotechnology B.V. or any of its affiliates (collectively, "Paradigm") in the United States or in other countries: Paradigm™, Paradigm logo, Artist™, Cement-IT™, EarthStudy 2D™, e-Geoscience™, Epos™, Explorer™, EZdip™, Focus™, GeoDepth™, GeoLAN™, Geolog®, GeoScene™, GeoSec™, iMap™, IntegralPlus™, LogLAN™, MapLAN™, NexModel™, OpenGeo Tools™, PlaNet™, Probe™, Pump-IT™, Reservoir Navigator™, ResSim™, Rock & Fluid Canvas™, SeisEarth™, SeisFacies™, SeisX™, Slider™, SolidGeo™, Stratimagic™, Surveyor™, Sysdrill™, Sysdrill Director™, Sysdrill DirectorGeo™, Sysdrill IDEAS™, Sysdrill SaG™, Vanguard™, Velocity Navigator™, VG Tools™, VollAN™, VoxelGeo™, VXplot™, and/or other Paradigm products referenced herein.

All rights not expressly granted are reserved.

The following are trademarks or registered trademarks of their respective companies or organizations:

GOCAD, Alea, and Jacta are registered trademarks or service marks of Earth Decision Sciences Corporation (formerly T-Surf S.A.). Alea and Jacta software under license from TOTAL, All Rights Reserved. Linux is a registered trademark of Linus Torvalds. Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries.

All other trademarks are owned by their respective owners.

Configuring Reservoir Simulation Interface

If you have a Reservoir Simulation Interface license and you want to launch flow simulations from GOCAD Suite, your Information Technology department must configure simulator launch parameters for Reservoir Simulation Interface based on:

- The simulator used (ECLIPSE or 3DSL)
- The local operating system (Windows, Linux, or both)
- The mechanism through which the simulator executable is accessed (locally via the command line, remotely via a remote shell (RSH) on another host, or through a Web portal by specifying a Web address)


A default configuration template, which resides at PDGM\2.5.0\ReservoirProduction\app-defaults\default_run_config.xml, must be edited and renamed or copied to run_config.xml in the same directory. Modifying this template may require the assistance of your site system engineer or a Paradigm consultant. The configuration file can contain information relating to multiple simulators, operating systems, or launch mechanisms.

Your Information Technology department can incorporate custom modifications to the launch panel by defining a user interface (UI) component that allows you to enter or select certain launch parameters directly from the Reservoir Simulation Interface UI, rather than storing them in the configuration file. Default parameters can be set for this UI component.

Configuration File Format

Figure 1 shows the hierarchy of elements that make up the configuration file.

Figure 1 Hierarchy of elements in the configuration file

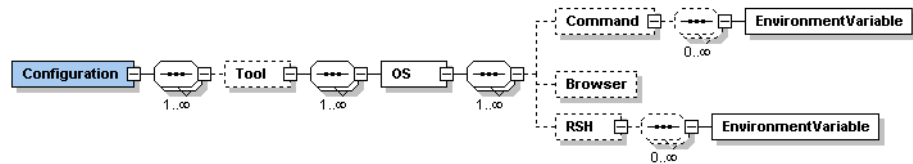

Below the mandatory **Configuration** description, the following elements must be specified (bold text corresponds to the labels in Figure 1; italicized text corresponds to words in the example configuration file in Figure 2):

- **Tool** is where you specify the *name* of the simulator, that is, "3DSL" or "Eclipse."
- **OS** is where you specify the *type* of operating system for which the launch mechanism description that follows will be valid, that is, "Windows," "Linux," or "All."

One of the following launch mechanisms must then be specified:

- **Command** to launch the executable through a command line
- **Browser** to go to a specific Web address for job submittal
- **RSH** to remotely log on to another computer and launch the simulation

Each will have the following components:

- **description.** A unique name given to a particular launch configuration that will appear on the RSI launch panel
- **value.** An instruction executed at launch (see Table 1)

- **uicomponent** (optional). The location of the .ui file containing the custom parameter entry UI component (see "Customizing the User Interface" on page 1-4).

Environmental variables, for example specifying the location of the license file, that need to be set before the simulation is launched, must be specified as **EnvironmentVariable** which includes the following components:

- *name*. The name of environment variable
- *value*. The corresponding value

Table 1 Instruction executed for each launch mechanism

| Launch mechanism | What is launched |
|------------------|--|
| Command | The <i>value</i> attribute which should be the path to the simulator executable and the parameter file |
| Browser | The local default browser with the Web address specified in the <i>value</i> attribute |
| RSH | The RSH command with the parameters described in the value attribute |

Configuration File Example

Figure 2 shows an example configuration file, run_config.xml.

Figure 2 Example configuration file

```

<?xml version="1.0" encoding="UTF-8" ?>
- <Configuration xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="Configuration1.xsd">
- <Tool name="3DSL">
- <OS type="Windows">
- <Command description="1.0 (Standard Version)" uicomponent="C:\Temp\form1.ui"
  value="C:\Users\Jack\EarthDecision\3dsl-pc-060705.exe "$PARAMETER_FILE" -
  testparam=$UI.input_1">
  <EnvironmentVariable name="LSFORCEHOST" value="ODEON" />
</Command>
<Command description="Show Env. Variables" uicomponent="default_custom_form.ui" value="cmd /C echo
  $PARAMETER_FILE () $PARAMETER_FILE_WO_EXT () $UI.input_1 () %USERNAME%" />
- <Command description="1.0 (on Server alpha)" value="C:\Users\Jack\EarthDecision\3dsl-pc-060705.exe
  "$PARAMETER_FILE">
  <EnvironmentVariable name="LSFORCEHOST" value="ODEON" />
</Command>
</OS>
- <OS type="Linux">
- <Command description="Launch local" value="/apps/3sdl/bin/3dsl $PARAMETER_FILE">
  <EnvironmentVariable name="LSFORCEHOST" value="odeon" />
</Command>
</OS>
- <OS type="All">
  <Browser description="Launch browser" value="http://portal/3dsl?deck=$PARAMETER_FILE" />
  <RSH description="Launch remote" value="host_name 3dsl $PARAMETER_FILE" />
</OS>
</Tool>
- <Tool name="Eclipse">
- <OS type="Windows">
- <Command description="Launch local" value="W:\Applications\Eclipse /deck $PARAMETER_FILE_WO_EXT">
  <EnvironmentVariable name="LM_LICENCE_FILE" value="7321@odeon" />
</Command>
</OS>
- <OS type="Linux">
- <Command description="Launch local" value="/apps/eclipse/bin/eclipse $PARAMETER_FILE_WO_EXT">
  <EnvironmentVariable name="LM_LICENSE_FILE" value="7321@odeon" />
</Command>
</OS>
- <OS type="All">
  <Browser description="Launch browser" value="http://portal/eclipse?deck=$PARAMETER_FILE" />
  <RSH description="Launch remote" value="host_name eclipse $PARAMETER_FILE" />
</OS>
</Tool>
</Configuration>

```

Figure 3, Figure 4, and Figure 5 show the resulting **General Settings** (launch) panel with **Browser**, **Local host**, and **RSH** selected, respectively:

Figure 3 General Settings panel with Browser selected

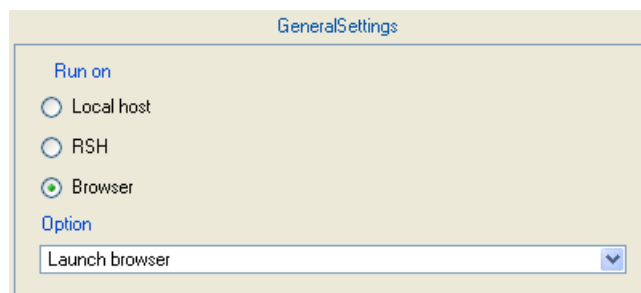


Figure 4 General Settings panel with Local host selected


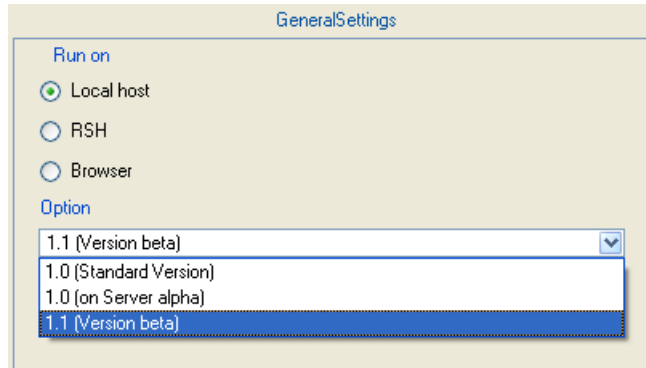


Figure 5 General Settings panel with Local host selected and custom UI component specified

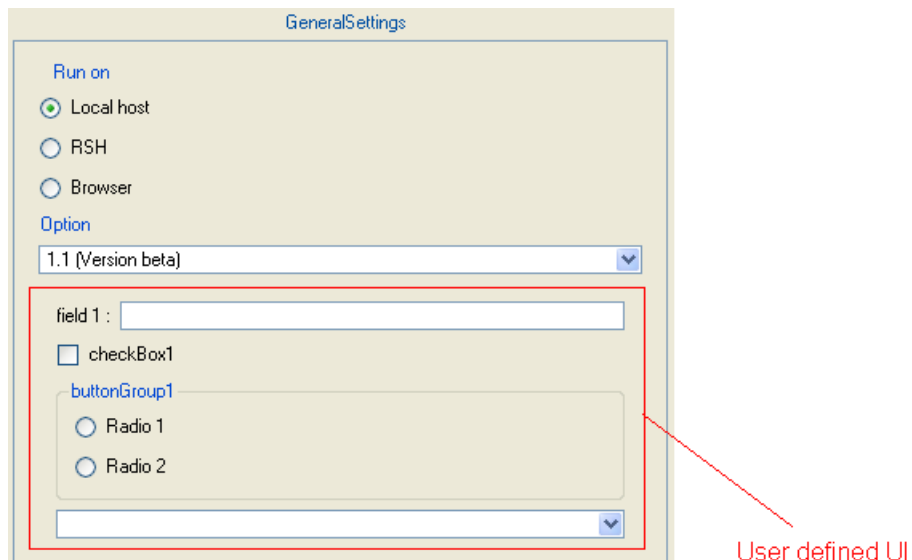

Customizing the User Interface

The customization of the UI ("uicomponent" attribute) is limited to the following controls:

- **QLineEdit** (single line edit control). The corresponding string variable will be replaced by the content of edit control.
- **QCheckBox** (check box). If selected, the corresponding string variable is replaced by the label of the check box ; if cleared, the string variable is replaced by empty text.
- **QButtonGroup** (exclusive and filled with QRadioButton). The corresponding string variable is replaced by the label of the selected radio button.
- **QSpinBox** (edit control and spin buttons). The corresponding string variable is replaced by the value of the edit control.
- **QListBox** (single selection mode). If a selection exists, the corresponding string variable is replaced by the selection text; if a selection does not exist, the macro is replaced by empty text.

- **QComboBox** (can be editable). The string variable is replaced by the text of the combo selection.

Notes

- You should store the .ui file or files in PDGM\2.5.0\ReservoirProduction\lib\app-defaults\ (the folder where run_config.xml resides). A default file (default_custom_form.ui) is available as a template.
- Every "value" attribute (in Command, Browser, Rsh, and EnvironmentVariable) can contain references to UI fields. Those references take the form of a string variable, "\$UI.field_name". This is illustrated in the preceding example, where the first widget is called "input_1," and its value is used through the string variable, "\$UI.input_1"

Predefined String Variables

Table 2 lists the predefined string variables of the *value* attribute:

Table 2 Predefined string variables

| Macro | Description |
|-------------------------|--|
| \$PARAMETER_FILE | Full path name of parameter file (e.g. "C:\Users\gocad\study.dat"). This file will be generated by RSI compliant with the simulator selected. |
| \$PARAMETER_FILE_WO_EXT | Full path name of parameter file without extension (e.g. "C:\Users\gocad\study"). This file will be generated WITH the extension by RSI compliant with the simulator selected. |



North America

Houston
Tel: +1 (713) 393 4800

Calgary
Tel: +1 (403) 538 2133

South/Latin America

Mexico
Tel: +52 993 330 0668

Caracas
Tel: +58 (0) 212 265 5485

Rio de Janeiro
Tel: +55 21 2103 7645

Europe

London
Tel: +44 (0) 208 956 2464

Paris
Tel: +33 (0) 1 49 49 05 10

Aberdeen
Tel: +44 (0) 1224 646425

Middle East

Dubai
Tel: +971 (0) 4 391 2630

Far East

Beijing
Tel: +86 10 8458 4150

All marks, trademarks, and registered trademarks acknowledged.